



# AP SERIES POWERSPORTS BATTERIES

UPG No. 48131

# APP30L

## Lithium Iron Phosphate

Specially designed as a high-performance lithium starting battery. Characteristics are 1/3 the weight of a normal lead-acid battery, non polluting, super cranking power, quick recharge capability and excellent cycle life.

### Specification

<b>Nominal Voltage</b>	12.8 Volts
<b>Nominal Capacity (10H-R)</b>	12 Ah (Equal in starting performance to a 30 Ah SLA)
<b>CCA</b>	600
<b>Approximate Weight</b>	4.63 lbs (2.1 kgs)
<b>Charging Current</b>	Standard: 6.0A, Max: 48.0A
<b>Charging Voltage Limit</b>	14.4±0.5
<b>Operating Temperature Range</b>	Discharge: -10°C ~ 60°C Charge: 0°C ~ 45°C Storage: -20°C ~ 40°C
<b>Cycle Life</b>	≥1000
<b>Self Discharge</b>	Batteries can be stored for 12 months at 25°C. For higher temperatures the duration will be shorter
<b>LED SOC Indicator</b>	Indicates the battery state of charge
<b>Warranty</b>	1 Year Full Replacement


**For starting mass produced internal combustions engines only.**



Due to continuous improvements to our products, product may vary slightly from depiction.

### Physical Dimensions: in (mm)

**L: 6.50 (165) W: 3.43 (87) H: 5.12 (130)**

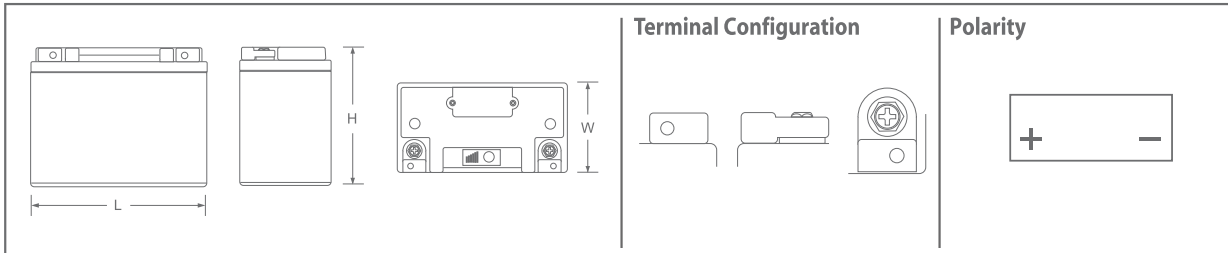


Front



Side



Terminals

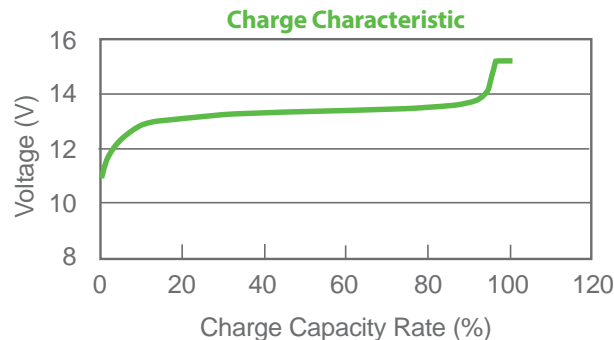

Kinetik® is a registered trademark of Universal Power Group, Inc.

[www.kinetikpower.com](http://www.kinetikpower.com)

All specifications are subject to change without notice.

[www.upgi.com](http://www.upgi.com)

488 S. Royal Lane | Coppell, Texas 75019 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | [sales@apbatteries.com](mailto:sales@apbatteries.com)

U1522-1