

SP100M-36


100W Monocrystalline Solar Panel High Efficient Monocrystalline

Electrical Data	SP100M-36
Maximum power (Pmax)	100W
Voltage at Pmax (Vmp)	18.29V
Current at Pmax (Imp)	5.78A
Open-circuit voltage (Voc)	21.6V
Short-circuit current (Isc)	6.13A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/ °C
Temperature coefficient of power	-(0.5±0.05)%/ °C
NOCT (Air 20°C; Sun 0.8kW/m ² wind 1m/s)	47±2°C
Operating temperature	-40°C to 80°C
Maximum system voltage	1000V DC
Power tolerance	± 3%

* STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C


* NOCT: Nominal operating cell temperature (the data is only for reference)

Dimensions Of PV Module

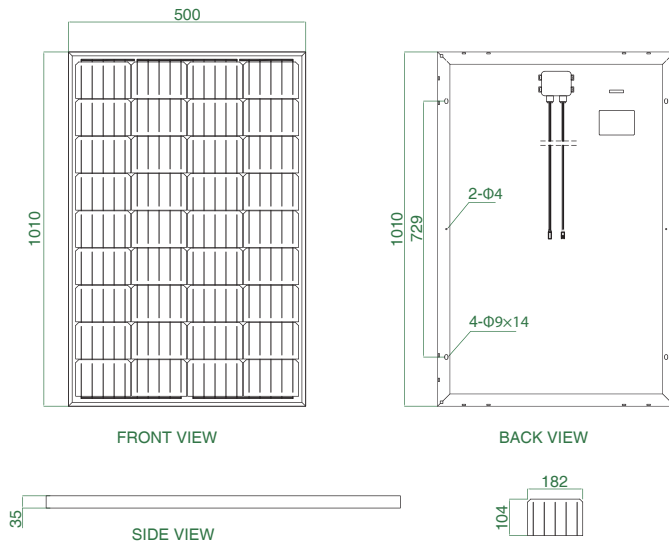

*All Dimensions in mm

Specifications	SP100M-36
Cells	Mono 182x104 mm
No. of cells and connections	36(4x9)
Module dimension	1010x500x35 mm 39.8x19.7x1.4 inch
Weight	8.6 kg
No. of Mounting Holes	4
No. of Waterspout Holes	16

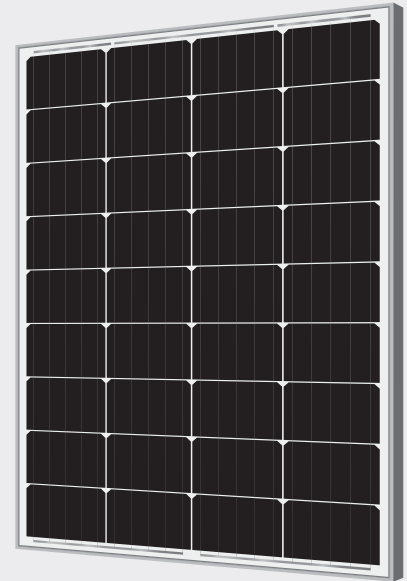

25 25-year guarantee for 80% rated power

10 10-year product workmanship

10 10-year guarantee for 90% rated power

Features

- Excellent power generation performance
- Nominal 12V DC for standard output.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.

Applications

- Traffic & Safety
- Federal Government
- Agricultural
- Security
- Telecommunications
- Water and Wastewater
- Weather & Environmental Monitoring
- RV Camper
- Emergency Power
- Telemetry

Characteristics

